
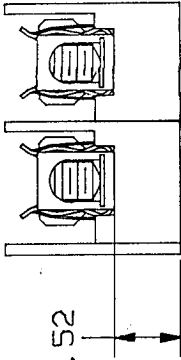
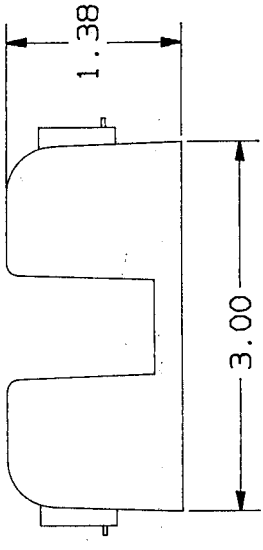


REV	DESCRIPTION	DATE	APPD
00	RELEASED	9/10/91	1/81

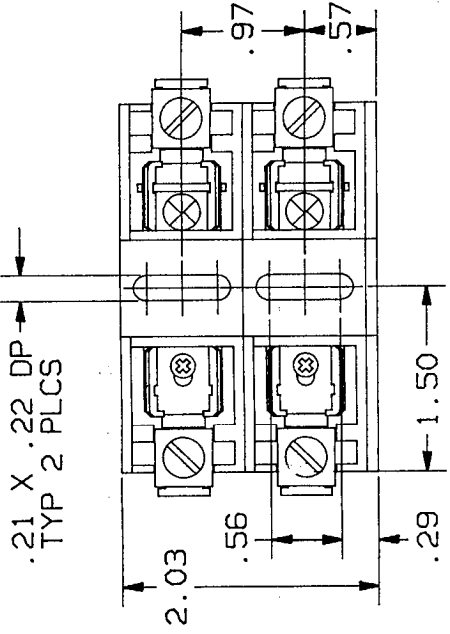

P/N	FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	WIRE		U/L		CSA REPORT NO.
				°C	TYPE	FILE NO.	GUIDE NO.	
20302	H.K	10K	35	60/75	CU-AL	E52283	IZLT	LR32169
20307	H.K	10K	35	60/75	CU ONLY			
20357R	R	200K	35	60/75	CU-AL CU ONLY			

REFERENCE  
MAR 16 1992

P/N 20302  
P/N 20307(R) SPRF  
P/N 20357(R) SPRF  
ADD 'R' FOR CLASS R

<p>NOTES UNLESS OTHERWISE SPECIFIED</p> <ul style="list-style-type: none"> <li>- ALL DIMENSIONS ARE IN INCHES</li> <li>- STAMP OR ETCH DNG. NO. ON PART</li> <li>- REMOVE ALL BURRS AND SHARP EDGES</li> <li>- TOLERANCES: XXXX±.0005; XXX±.005; XX±.01; X±.04; ANGLES 40°-30'</li> </ul>		<p>MATERIAL</p>	
<p>THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IS CONFIDENTIAL. MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.</p>		<p>GOULD SHAWMUT GOULD SHAWMUT P. O. BOX 729 MARBLE FALLS, TX 78654</p>	
FINISH	DATE	SIGNATURES	TITLE
DRWIN			FUSE BLOCK, 250V-30A 2 POLE BOX CONNECTOR
CHKD & DNG	6/10/91		DWG NO
REF OR STM DNG			05B0328
ASST DNG USED ON			SCALE
			1/1
			FILE NO
			1 OF 1
			SHEET
			1

- 3 OMIT REJECTION.
  - 2 OMIT SPRING AND REJECTION.
  - 1. MATL COMPOSITION AND RATING: POLYCARBONATE-125°C RTI.
- NOTES: UNLESS OTHERWISE SPECIFIED