




REV	DESCRIPTION	DATE	APPD
00	RELEASED	4/10/91	6/01

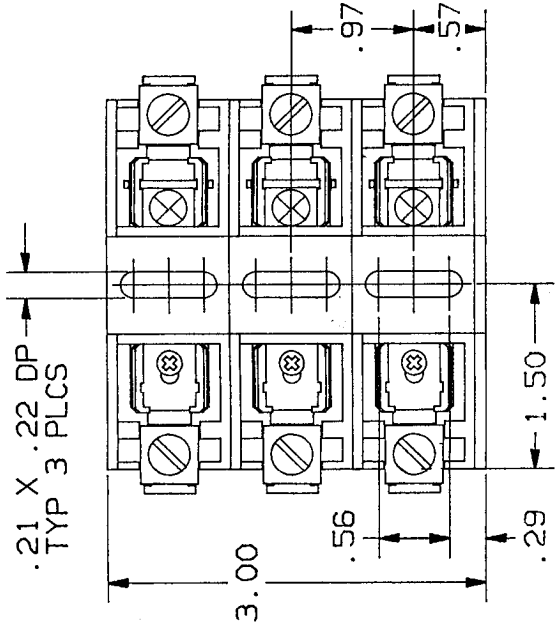

P/N	FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	WIRE			U/L		CSA REPORT NO.
				° C	TYPE	CU-AL	FILE NO.	GUIDE NO.	
20303	2	10K	35	60/75	CU-AL		E52283	IZLT	LR32169
20308	3	10K	35	60/75	CU-AL				
20358		200K	35	60/75	CU-AL				

MAR 16 1992

.52

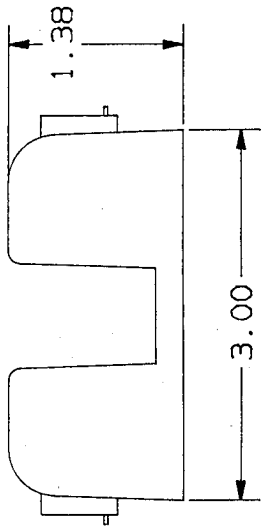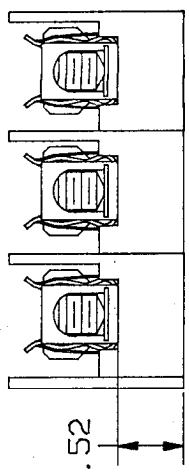

P/N 20303  
P/N 20308(R) SPRF  
P/N 20358(R) SPRF  
ADD 'R' FOR CLASS R

<p><b>GOULD SHAWMUT</b> GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654</p>		<p>PRODUCT INFO TITLE FUSE BLOCK, 250V - 30A 3 POLE BOX CONNECTOR</p>	
<p>MATERIAL</p>		<p>DATE</p>	
<p>FINISH</p>		<p>SIGNATURES</p>	
<p>DRWIN</p>		<p>ENG NO</p>	
<p>CHKD G. CARLSON 4/10/91</p>		<p>REV</p>	
<p>ENGD</p>		<p>05B0329</p>	
<p>APPD G. Carlson 4/10/91</p>		<p>SCALE</p>	
<p>ASST. ENG USED ON</p>		<p>1/1</p>	
<p>REF OR SIM CHG</p>		<p>FILE NO</p>	
<p>THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL, MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.</p>		<p>SHEET</p>	
<p>NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DRG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX±.0005; XXX±.005; XX±.01; X±.04; ANGLES ±0°30'</p>		<p>1 OF 1</p>	

- 3 OMIT REJECTION.
  - 2 OMIT SPRING AND REJECTION.
  - 1. MATL COMPOSITION AND RATING: POLYCARBONATE-125°C RTI.
- NOTES: UNLESS OTHERWISE SPECIFIED