
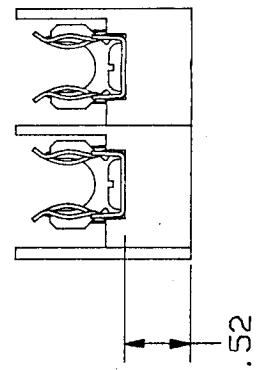
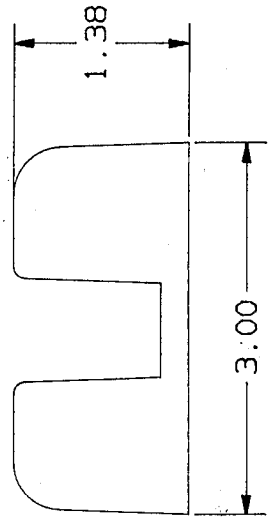


REV	DESCRIPTION	DATE	APPD
00	RELEASED	7/11/91	RM

.21 X .22 DP
TYP 2 PLCS

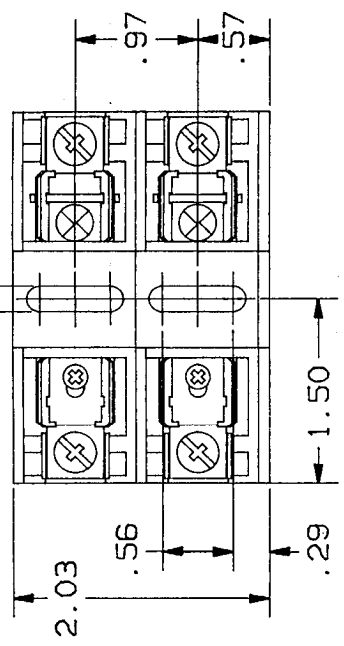

P/N	FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	WIRE		U/L		CSA REPORT NO.
				°C	TYPE	FILE NO.	GUIDE NO.	
20312 2	H,K	10K	20	60/75	CU ONLY	E52283	IZLT	LR32169
20317 3	H,K	10K	20	60/75	CU ONLY			
20317R	R	200K	20	60/75	CU ONLY			

REFERENCE

MAR 16 1992
P/N 20312
P/N 20317 SPRF
P/N 20317R SPRF

NOTES UNLESS OTHERWISE SPECIFIED
 - ALL DIMENSIONS ARE IN INCHES
 - STAMP OR ETCH DNG. NO. ON PART
 - REMOVE ALL BURRS AND SHARP EDGES
 - TOLERANCES: XXXX±.0005; XXX±.005; XX±.01; X±.04; ANGLES 40°-30'

THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL. MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.

- 3 OMIT REJECTION.
 - 2 OMIT SPRING AND REJECTION.
 - 1. MATL COMPOSITION AND RATING: POLYCARBONATE-125°C RTI.
- NOTES: UNLESS OTHERWISE SPECIFIED

GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654		PRODUCT INFO A
MATERIAL FINISH		TITLE FUSE BLOCK, 250V-30A 2 POLE SCREW CONNECTOR
SIGNATURES DATE		DNG NO 05B0330
DRWIN CHKD <i>S. Drake</i> 6/11/91		REV 00
ENGR APPR <i>M. Jensen</i> 7/11/91		SCALE 1/1
ASSY DNG USED ON		FILE NO 1 OF 1