



00 RELEASED  
 01 5/21/91 022 REDRAWN  
 02 3/3/95 1637 ADDED NOTE 3

RE  
 RE  
 RE  
 BM  
 RE

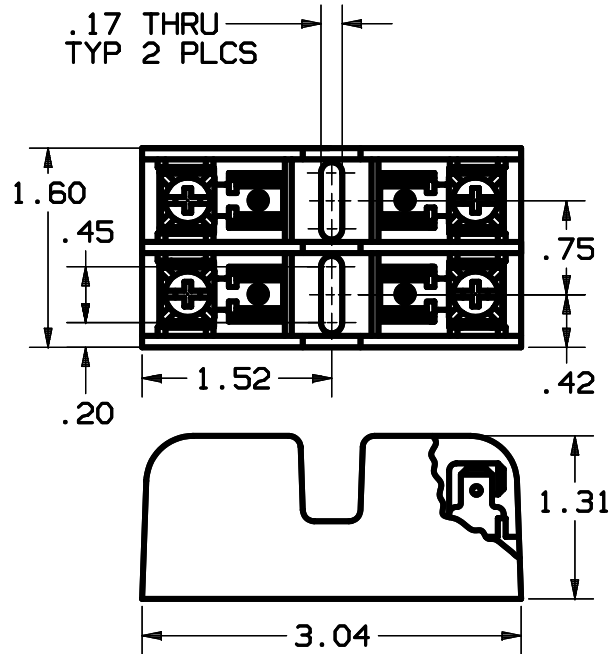

P/N	CONN TYPE	RMS SYM RATING 3	TORQUE (IN-LBS)	°C WIRE	U/L		CSA
					FILE NO.	GUIDE NO.	REPORT NO.
30312	SCREW	200K	20	75	E52283	IZLT2	LR32169
30322	PP	200K	20	75			



- 4. 600V-30A MIDGET 2 POLE W/2QC
- 3 RMS SYM RATING 200K WHEN QC NOT EMPLOYED  
 RMS SYM RATING 10K WHEN QC EMPLOYED
- 2. SHOWN W/ PRESSURE PLATE CONNECTOR.
- 1. MATL COMPOSITION AND RATING:  
 POLYCARBONATE-125°C RTI.

P/N 30312  
 30322

NOTES: UNLESS OTHERWISE SPECIFIED

GO 5/91  
 BM 5/91  
 FUSE BLOCK

05B0318 02