



REV	DATE	ECO	DESCRIPTION	BY	CK
00	6/94		RELEASED	GO	
01	7/14/94	1494	REV NOTE 3	KZ	GO

26 Ø X .12 DP
TYP 9 PLCS

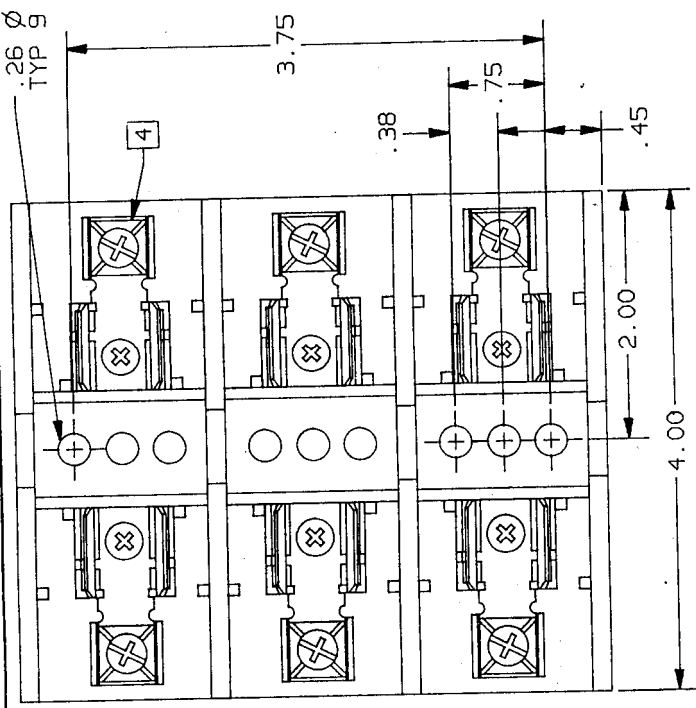

P/N	RMS SYM RATING	FUSE CLASS	TORQUE (IN-LBS)	WIRE		UL	CSA
				°C	TYPE		
60318J	200K	J	20	60/75	CU	E52283	IZLT LR32169
60328J	200K	J	20	60/75	CU		

CONTROLLED DOCUMENT
ISSUED TO *Newburyport*
DATE *JUL 25 1994*

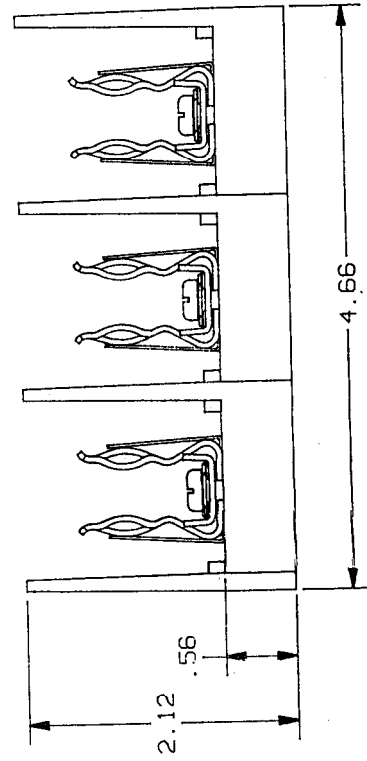

P/N 60318J
60328J

- [4] SHOWN W/PRESSURE PLATE CONNECTION
 - 3. 600V-30A CLASS "J" SP RF 3 POLE
 - 2. P/N 60318J USES SCREW CONNECTION.
 - P/N 60328J USES PRESSURE PLATE CONNECTION
 - 1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC 125°C RTI.
CONNECTOR-CU ONLY
- NOTES: UNLESS OTHERWISE SPECIFIED

GOULD GOLD INC.
CIRCUIT PROTECTION DIV.
MIDDLE FALLS, TX 75663

DATE: 6/94
DRAWN BY: KDS
CHECKED BY:

SCALE: NONE

TELEPHONE TO BE APPLIED UNLESS OTHERWISE SPECIFIED.
DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
DIMENSIONS APPLY AFTER PLATING UNLESS OTHERWISE SPECIFIED.
ALL SURFACES TO BE 12V UNLESS OTHERWISE SPECIFIED.
BREAK ALL SHARP EDGES.
THIS DRAWING AND ALL INFORMATION HEREON IS THE PROPERTY OF GOULD INC. AND IS TO BE KEPT UNLESS OTHERWISE AUTHORIZED.
THIS INFORMATION IS UNCLASSIFIED.

DESCRIPTION: FUSE BLOCK
IDENTIFICATION NO.: 05B0482
REVISION: 01