
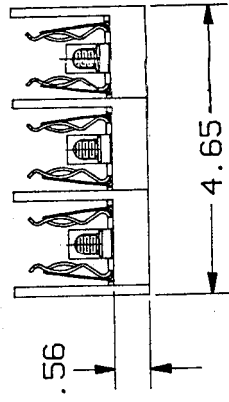
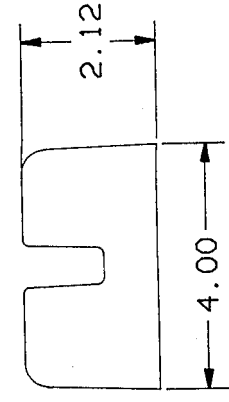


REV	DESCRIPTION	DATE	APPO
00	RELEASED	6/10/82	Bo

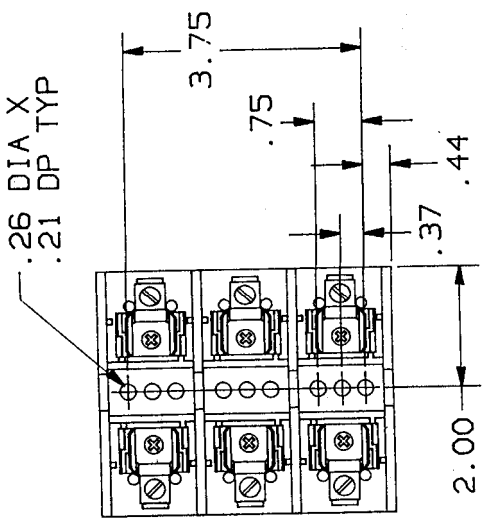

P/N	FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	WIRE		U/L		CSA REPORT NO.
				°C	TYPE	FILE NO.	GUIDE NO.	
60603J [2]	J	200K	45	60/75	CU-AL	ES2283	IZLT	LR32169
60608J	J	200K	45	60/75	CU-AL			
60658J	J	200K	45	60/75	CU ONLY			

**REFERENCE**  
MAR 1 6 1982

P/N 60603J  
P/N 60608J SPRF  
P/N 60658J SPRF

- [2] OMIT SPRING.  
1. MATL COMPOSITION AND RATING: POLYCARBONATE-125°C RTI.  
NOTES: UNLESS OTHERWISE SPECIFIED

<p><b>GOULD SHAWMUT</b> GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654</p>		<p>PRODUCT INFO</p>		<p>TITLE</p>	
<p>MATERIAL</p>		<p>FINISH</p>		<p>FUSE BLOCK, 600V - 60A 3 POLE BOX CONN</p>	
<p>NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - SLUMP OR FRETCH DRG NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX±.0005; XXX±.005; XX±.01; X±.04; ANGLES 40°30'</p>		<p>THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL. MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.</p>		<p>DRG NO 05B0336</p>	
<p>USEY RMS USED ON</p>		<p>REF OR STM DRG</p>		<p>SCALE NONE</p>	
<p>DRWN CHKD: G. OAKLEY</p>		<p>DATE 6/10/82</p>		<p>FILE NO</p>	
<p>ENGR APPO: B. Langene</p>		<p>APPROV: B. Langene</p>		<p>SHEET 1 of 1</p>	