


.50 ϕ C'BORE X .50 DP
 .28 DIA X .25 DP THRU
 TYPICAL 6 PLACES

TABLE I

P/N	RMS SYM RATING	FUSE CLASS	TORQUE (IN-LBS)	WIRE	U/VL	FILE NO.	GUIDE NO.	CSA REPORT NO.
61018	10K	H/K	72	60/75		E52283	1ZLT2	LR32169
61018R	10K	R	72	60/75				

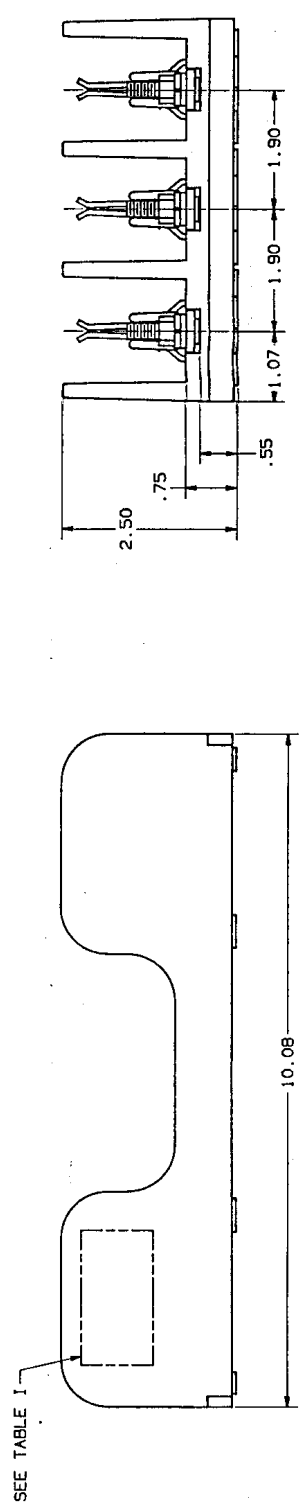

REFERENCE
 MAR 1 6 1992

P/N 61018 (R)
 ADD "R" FOR CLASS R

SUITABILITY FOR USE AT > 10K MUST BE DETERMINED IN THEIR END USE.
 USE SQUARE END OR INSULATED BARREL CONNECTOR.
 MATL COMPOSITION AND RATING: PHENOLIC-150°C RTI.
 NOTES: UNLESS OTHERWISE SPECIFIED

COULD SHAWMUT
 BULLOCK SHAWMUT
 HAWKLEY FALLS, TX 75854

THIS DRAWING IS UNCLASSIFIED
 DATE 08-14-2013 BY 60322/UC/STP/STP
 UNLESS INDICATED OTHERWISE
 THIS DRAWING IS UNCLASSIFIED
 DATE 08-14-2013 BY 60322/UC/STP/STP
 UNLESS INDICATED OTHERWISE

THIS DRAWING AND ALL INFORMATION THEREON
 IS UNCLASSIFIED EXCEPT WHERE SHOWN
 OTHERWISE AND IS SUBJECT TO RETURN OF
 INFORMATION

DATE: 05/08/92
 BY: STP/STP
 CHECKED: STP/STP
 DRAWN: STP/STP
 PART NO: 0500282
 QTY: 00
 SCALE: FULL
 SHEET: 1 OF 1