

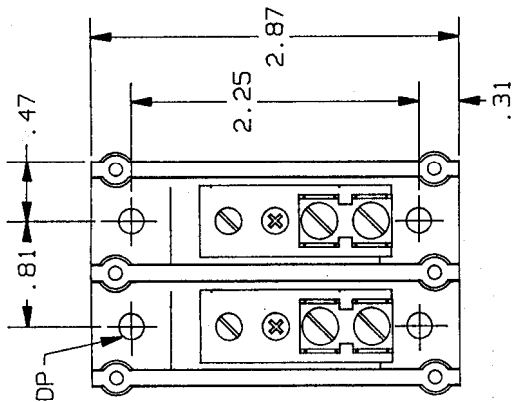


REV	DATE	ECC	DESCRIPTION	BY	CHK
00	3/90		RELEASED		BM
01	5/92	055	REVISED/UPDATED	M	Co

.20 Ø X .12 DP
TYP 4 PLCS

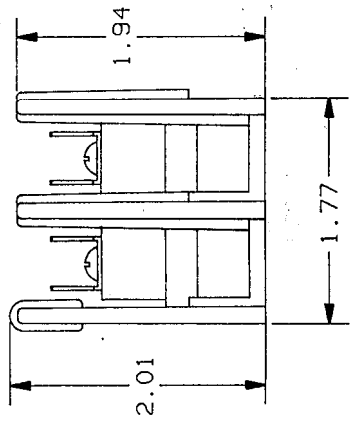

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL	CSA
	PRIMARY RANGE	SECONDARY RANGE	TORQUE	FILE NO. REPORT NO.		
62212	#4-#14	N.A.	N.A.	E73571	XCFR2	LR69363
	#8					
	#10-#14 20					



2. (1) #4-#14 X (4), .250 X .032 QC TABS 2 POLE, 600V CU ONLY
1. MAT'L COMPOSITION AND RATING: BASE-THERMOPLASTIC, 125°C RTI CONNECTOR-COPPER ALLOY-TIN PLATED.

NOTES:

REFERENCE

MAY 2 1 1992

P/N 62212

GOULD BULLDO INC.
P.O. BOX 778
CIRCUIT PROTECTION DIV., IRVING, TEXAS, TX 75039

DATE: 2/90
DRAWN BY: CW
CHECKED BY: GO
SCALE: NONE

REVISION NO. 1
IDENTIFICATION NO. 05B0114

TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .0004, .0008, .001, .002, .005, .01, .02, .05, .1, .15, .2, .3, .5, .75, 1.0, 1.5, 2.0, 3.0, 4.0, 6.0, 8.0, 10.0, 15.0, 20.0, 30.0, 40.0, 60.0, 80.0, 100.0, 150.0, 200.0, 300.0, 400.0, 600.0, 800.0, 1000.0. DIMENSIONS APPLY AFTER PLATING.

ALL SURFACES TO BE TYP UNLESS OTHERWISE SPECIFIED.

THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF BULLDO INC. AND IS LOANED TO YOU FOR YOUR USE ONLY. IT IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN AUTHORIZATION OF BULLDO INC.

REFDOC: PDB