REV	DATE	ECO	DESCRIPTION	BY	CK
00	8/17/94	1524	RELEASED		

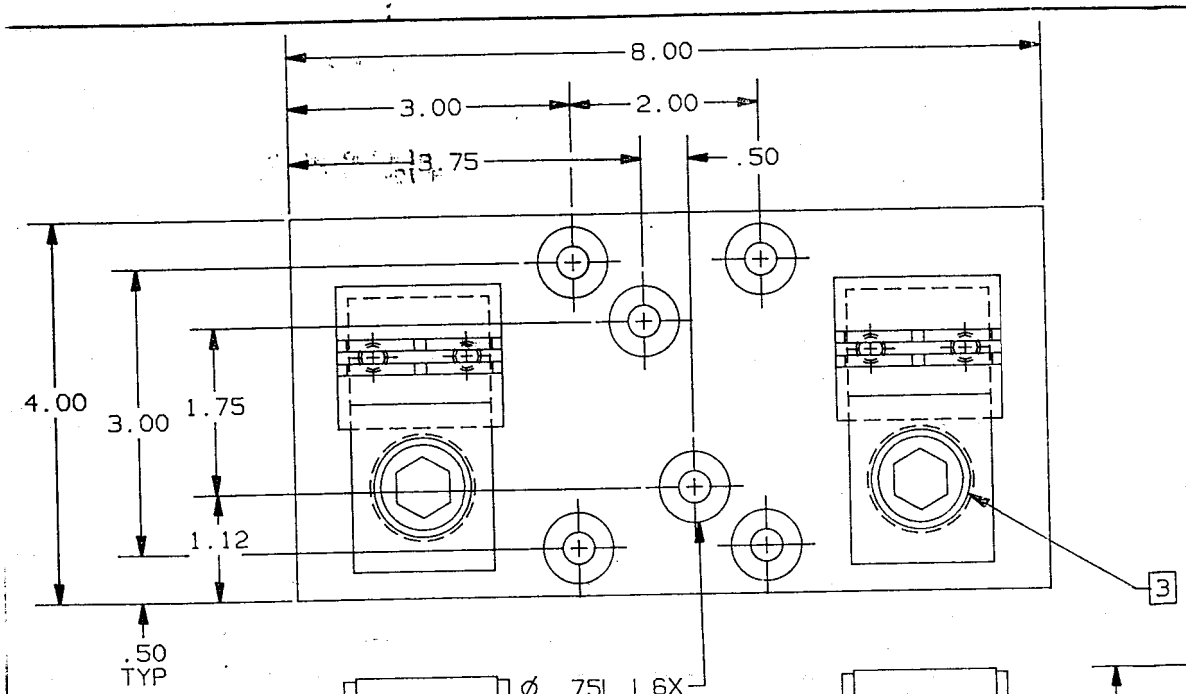

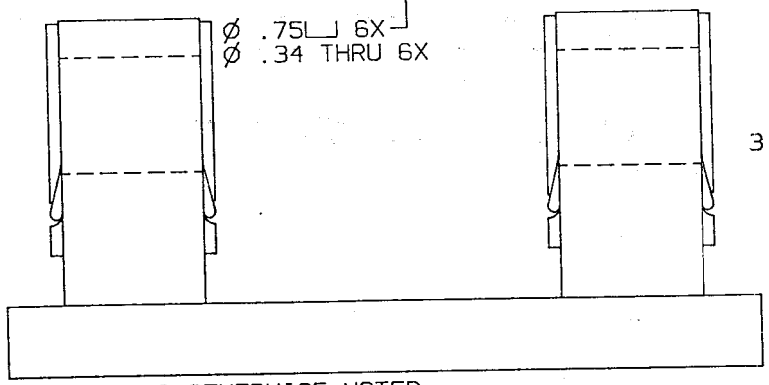

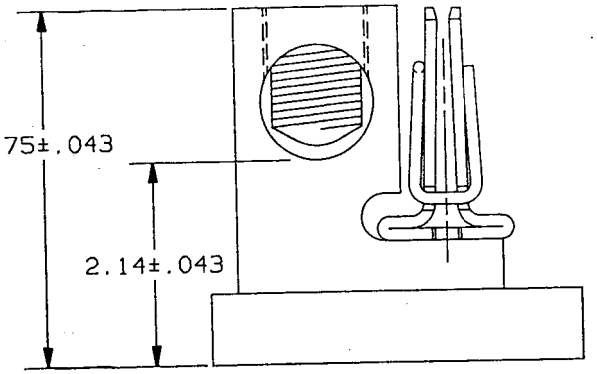

P/N	CONN TYPE	TORQUE (IN-LBS)	WIRE	
			°C	TYPE
64001J	BOX	780	60/75	AL-CU
64051J	BOX	500	60/75	CU ONLY

CONTROLLED COPY

ISSUED TO Newburyport

DATE AUG 19 1994

P/N 64001J
64051J

4. TOLERANCE ±.015 UNLESS OTHERWISE NOTED

[3] 64001J USES 9/16 HEX SOCKET WRENCH.
64051J USES 3/8 HEX SOCKET WRENCH.

2. 600V-400A ONE POLE CLASS J

1. MATERIALS: BASE- PHENOLIC
HARDWARE- TIN PLATED COPPER ALLOY OR ALUMINUM

NOTES: UNLESS OTHERWISE SPECIFIED

GOULD
GOULD INC.
P.O. BOX 728
MARBLE FALLS, TX 78654
CIRCUIT PROTECTION DIV.

DRAWN BY:	DATE:	INIT. REL.
KDS	8/94	
CHECKED BY:	DATE:	SCALE: NONE

TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .XXXXa.0005:, .XXXa.005:, .XXa.01:, .Xa.03: X/XXI/32
UNSPECIFIED ANGLES±1°, SPECIFIED ANGLES±0°30'
DIMENSIONS APPLY AFTER PLATING
ALL SURFACES TO BE 125 UNLESS OTHERWISE SPECIFIED
BREAK ALL SHARP EDGES
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD INC. AND IS SUBJECT TO RETURN ON DEMAND. THIS INFORMATION IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED.

REFDOC:

DESCRIPTION: FUSE BLOCK, 400A J SERIES

IDENTIFICATION NO. & REVISION: 05B0488 00