
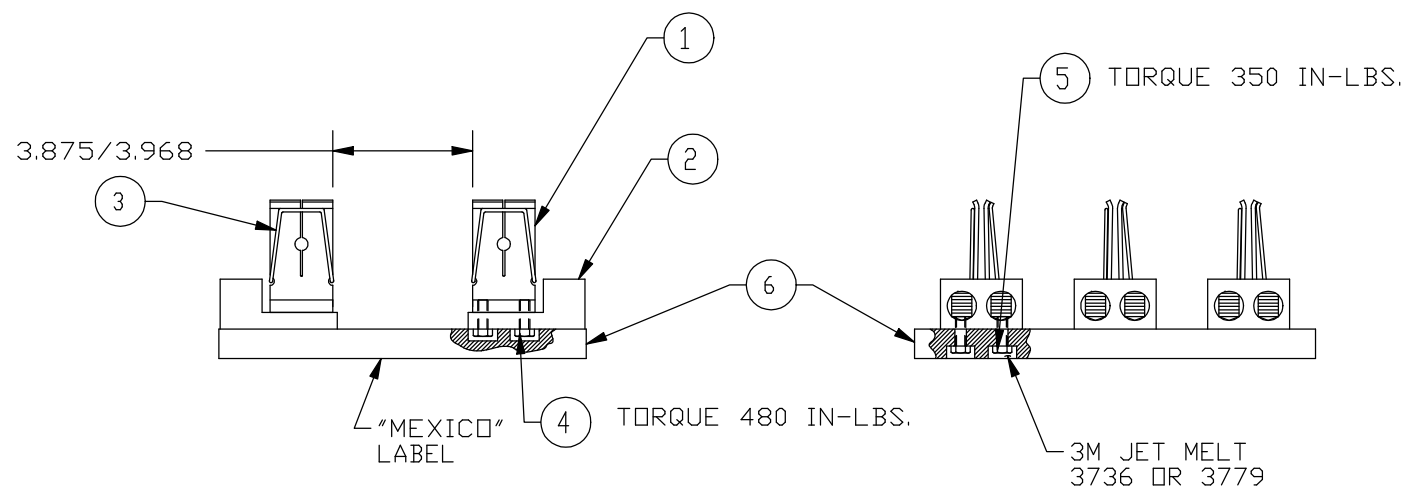


REV	DATE	ECO	DESCRIPTION	BY	CK
00	4/11/95		RELEASED		

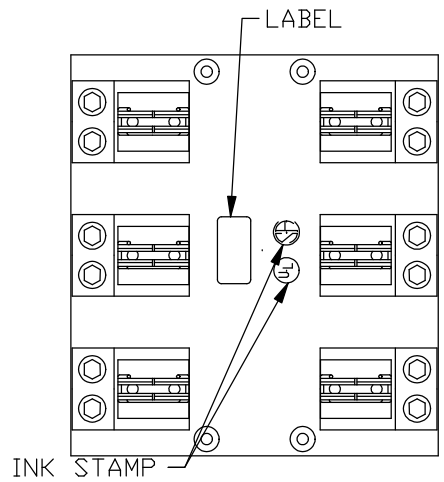

NOTE
 1. MUST WITHSTAND FOR 1 SECOND, WITHOUT BREAKDOWN, THE APPLICATION OF 2640V AC BETWEEN LIVE PARTS AND EXPOSED NON-CURRENT-CARRYING-METAL PARTS.

P/N 6633J
 6663J

 GOULD GOULD INC. P.O. BOX 729 MARBLE FALLS, TX 78654 CIRCUIT PROTECTION DIV.	TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .XXX±.0005; .XXX±.005; .XX±.01; .X±.02; .X/X±1/32 UNSPECIFIED ANGLES±1°; SPECIFIED ANGLES±30° DIMENSIONS APPLY AFTER PLATING ALL SURFACES TO BE 125 UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES THIS DRAWING AND ALL INFORMATION THERE ON IS THE PROPERTY OF GOULD INC. AND IS SUBJECT TO RETURN ON DEMAND. THIS INFORMATION IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED.
	DRAWN BY: CEP DATE: 3/95 INIT. REL.
CHECKED BY: DATE: SCALE: NONE	REF DOC:
DESCRIPTION ASSEMBLY, 600V-600A, 3 POLE	IDENTIFICATION NO. & REVISION 31B0506 00