


750V DC


SQUARE-BODY FUSES/SPECIAL PURPOSE

DC Voltage Capabilities vs. Time Constant

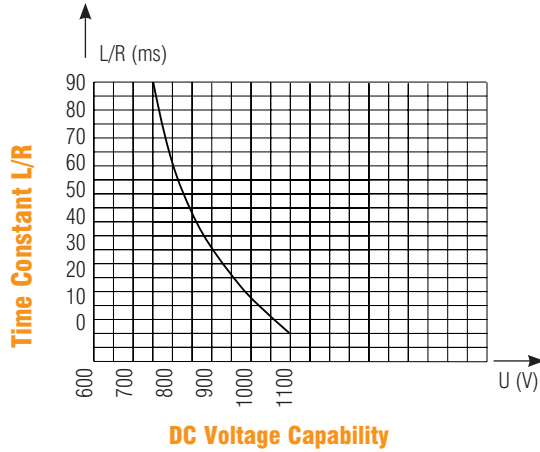


Above: Curve indicates maximum permissible value of time constant L/R as a function of DC working voltage.

Peak Arc Voltage vs. Working Voltage

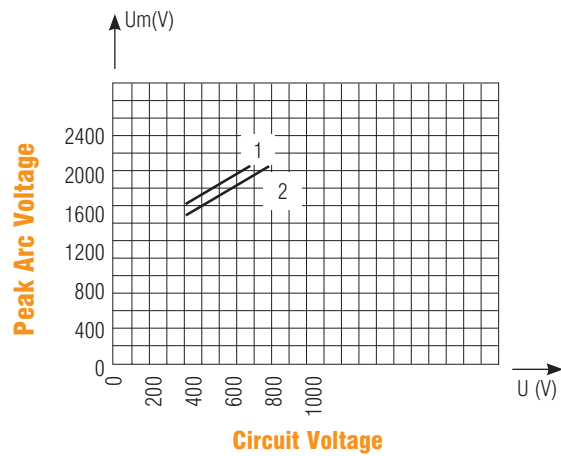


1-L/R = 45ms
2-L/R = 15ms

Melting Time-Current Data

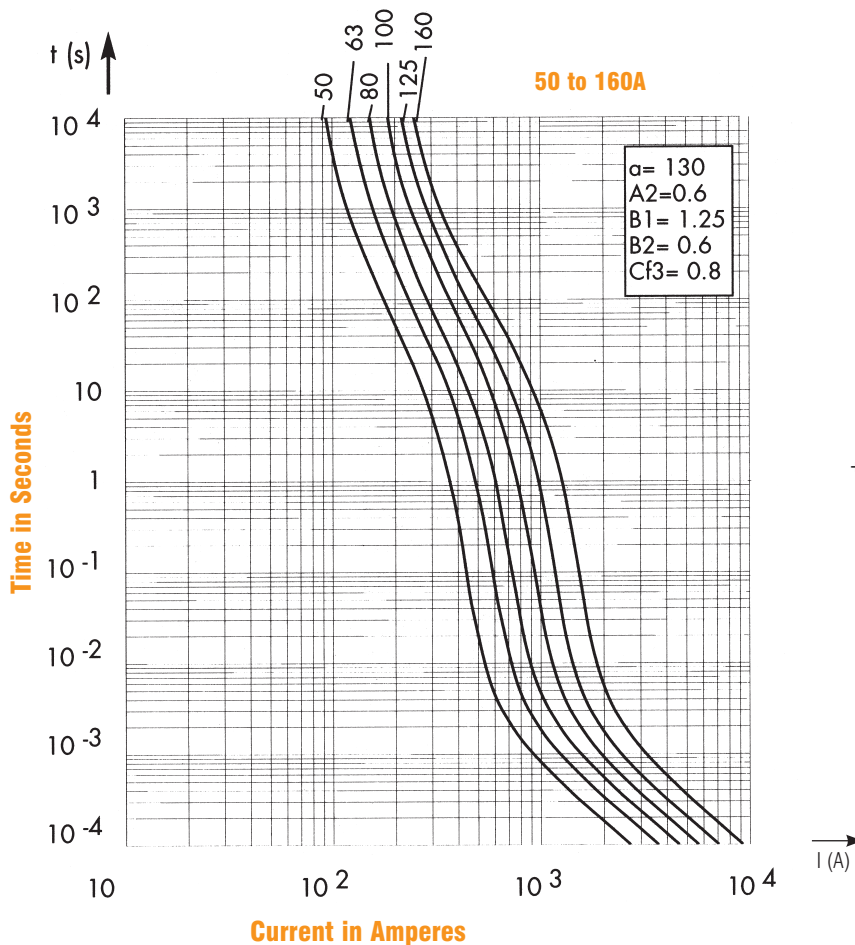

Above: Curves indicate, for each rated current, pre-arcing (melting) time vs. R.M.S. pre-arcing (melting) current.



± 7% tolerance for mean pre-arcing (melting) current